



10.24kwh BMS Wall Mounted Lifepo4 Battery 200Ah Flexible Configuration

Basic Information

Place of Origin: ChinaBrand Name: XWELL

• Certification: UN38.3,MSDS,UL,CB,BIS,PSE,GB4943.1

safety standard, CE, FCC, ROHS, battery UN38.3, MSDS, UL, CB, BIS, PSE

Model Number: XW-10240W-1

Minimum Order Quantity: 1 pcsPackaging Details: Carton

• Delivery Time: 7-10 working days

• Payment Terms: L/C, D/A, D/P, T/T, Western Union,

MoneyGram

Supply Ability: 5000 pcs per month



Product Specification

Battery Number: 51.2V200Ah
Battery Capacity: 10.24kwh
Working Voltage: 51.2V

Cell Model: LiFePO4 Prismatic Cell
 Communication Interface: RS485, RS232, CAN

Internal Impedance: ≤0.8mΩ
 Standard Charge Voltage: 58.4V
 Max Charge Current: 40A

Parallels Function: Support 8 Units In Parallels

• Discharge Cut-off Voltage: 40V

• Highlight: BMS Wall Mounted Lifepo4 Battery,

Wall Mounted Lifepo4 Battery 200Ah, 10.24kwh wall mount lifepo4 battery

Product Description

10.24kwh xwell 51.2V BMS LifePo4 Solar 200Ah Wall Mounted Lifepo4 Battery Power Station

Backup Power Protection

User has already installed xwell energy system at home, energy storage system can work as homepower backup directly, you can DIY quickly instead of waiting for qualified electrician.

No need communication with xwell inverter you already installed, no need any change for the existing xwell energy system.

Expandable capacity


- 1. flexible configuration, modular design, effortless
- 2. high power
- 3. high safety lifepo4 battery
- 4. multiple application, on-grid, off-grid, backup power
- 5. long lifespan, over 10 yearslifecycle 6000+ times

Features of Wall Mounted Lifepo4 Battery

- 1. 24-hour clean energy supplying
- 2. 10 years designed lifespan
- 3. Flexible design, easy to scale up
- 4. Easy to wall mount
- 5. Compact size and space saving

Specification of Residential Battery Storage System

Model	51.2V50Ah	51.2V100Ah	51.2V200Ah
Nominal capacity (kwh)	2.56	5.12	10.24
Nominal voltage	51.2V		
Cell type	LiFePO4		
Standard charge voltage	58.4V (adjustable)		
Max discharge current	40A	80A	120A
Discharge cut-of voltage	40V (adjustable)		
Max discharge current	50A	100A	200A
Parallels Function	Support 8 units in parallels		
Communication interface	RS485, RS232, CAN		
Cycle life	>6000 Cycles(80%DOD)		
Charge temperature range	0~65°C		
Discharge temperature range	-20~65°C		
Color	white		
Dimension(mm)	550x440x125	600x510x173	800x710x273
Weight	29kg	47kg	80kg
Installation method	Wallmounted/Floor type		

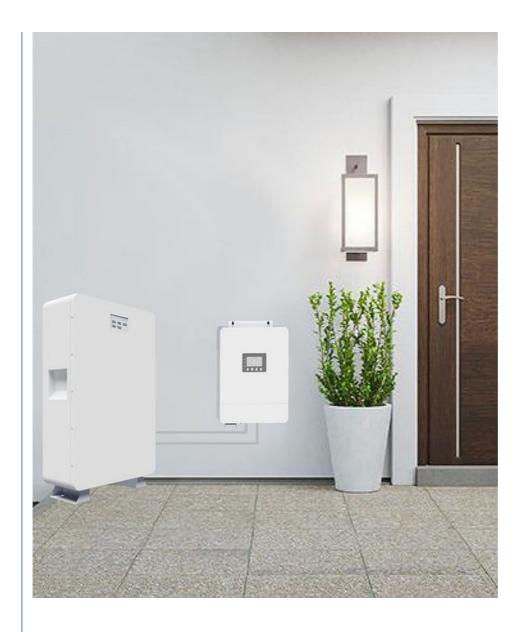

Connection diagram




Home Energy Storage System Operation Pannel




- Output negative pole
- 2 Output positive pole
- 3 → RS232 communication port (software update)
- 4 RS485/CAN communication port(communicate with inverter)
- 5 Switchs for address

Home Energy Storage System Size

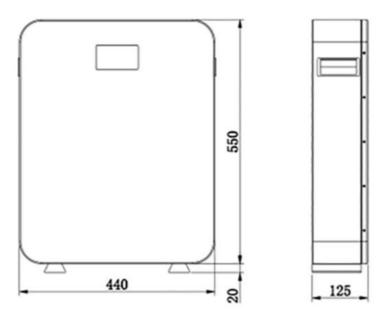


Single battery pack wiring diagram

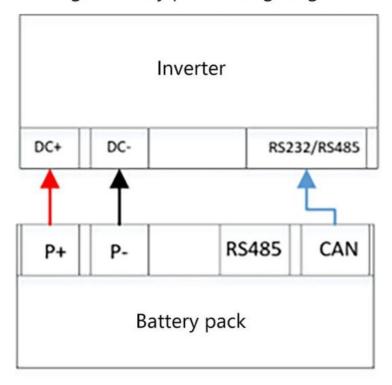

Home Energy Storage System Parallels Connection Wiring Diagram

Parallel connection wiring diagram of multiple battery packs

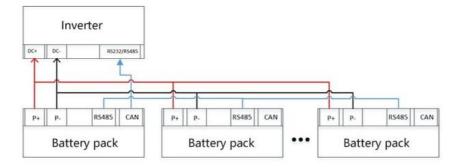

FAQ

A: We have a perfect pre-sales service and after-sales service system. We will start to track the whole process from the factory production, and there will be a service specialist to provide you with exclusive service, so as to ensure that there is no problem in the entire order process.

2. Q: Do you provide samples?

A: Yes, sample orders are welcomed.

3. Q: Do you provide OEM&ODM service?

A: Yes, we provide OEM&ODM service for most of our products. Please contact our sales manager for details.

4. Q: What can you buy from us?

A: Solar Panel, BIPV, Solar cleaning robot, Battery, Portable power supply, and other solar energy products. If you have any needs, you can contact our sales managers. We will find the best solution for you.

5. Q: Are the products in stock?

A: For most products, we have inventory and will arrange delivery in time. For large orders, we will calculate the delivery time accordingly and communicate with you.

XWELL GUANGDONG XWELL TECHNOLOGY CO., LTD.



+86 18620492985



sales@esslithiumbattery.com



esslithiumbattery.com

Room 322, Building 3, No. 801, Qiaoxing Avenue, Xiaoluo Village, Shatou Street, Panyu District, Guangzhou,